

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

Measurements

GS-3390

- 11.94 m (39 ft 2 in) working height
- Up to 1,134 kg (2,500 lbs) lift capacity

GS-4390

- 14.75 m (48 ft 4 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

GS-5390

- 17.95 m (58 ft 10 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

Productivity

- Diamond plate deck
- Replaceable aluminum deck
- Folding guardrails
- Two self-closing full-height swing gates
- Proportional lift and drive
- Onboard diagnostic system
- Hydraulic oil cooler
- AC power to platform
- Positive traction control
- Four-wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Dual Flashing LED beacons
- Horn
- Hour meter
- Telematics-Ready Connector

Power

- All engines are emissions compliant
- 12V DC auxiliary power
- Slide-out engine tray

Platform Options

- 3.98 x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform (standard)
- 1.52 m (5 ft) slide-out extension deck (standard)
- Dual slide-out platform extension deck package⁽¹⁾, 1.52 m (5 ft) front and 1.22 m (4 ft) rear (optional)
- 7.38 m (24 ft 2.5 in) super deck platform extension package^(1,2) (optional)

Outrigger Options

- Automatic levelling hydraulic outriggers⁽¹⁾ (standard on GS™-5390, optional on GS™-3390 and GS™-4390)
- No outriggers

Engine

- Deutz diesel 36 kw (49 hp)

Drive

- 4 x 4

Axle Options

- Oscillating axle (standard on GS™-3390, optional on GS™-4390 and GS™-5390)
- Non oscillating

Tyre Options


- Foam-filled rough terrain (standard)
- Foam-filled, non-marking rough terrain

Productivity Options

- Air line to platform
- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Track & Trace ⁽³⁾ (GPS unit providing machine location & operating information)
- Motion alarm

Power Options

- Diesel catalytic scrubber muffler
- Low temperature cut-out module
- Engine heater
- 220V/50Hz or 110V/50Hz Generator for Big Deck scissors

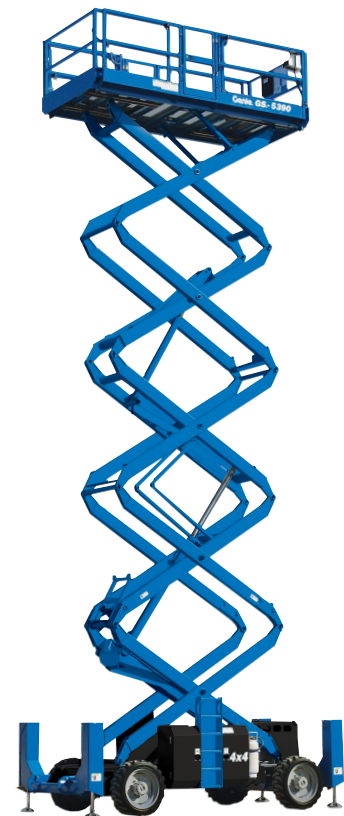

⁽¹⁾ Factory fit option only

⁽²⁾ Requires automatic levelling outriggers

⁽³⁾ Includes a first 2 years subscription